




DES PDM 24




Cable entry plates with internal frame and double membrane

- ▶ For large number of cables without connectors
- ▶ High strain relief thanks to the double membrane
- ▶ Cost efficient solution
- ▶ IP66 and NEMA 4X* certified
- ▶ ATEX version on request (see group 7)
- ▶ Threaded inserts or plastic rivets version on request

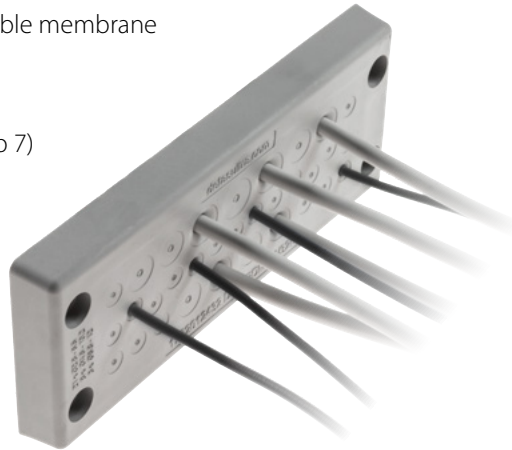

Double parallel membrane

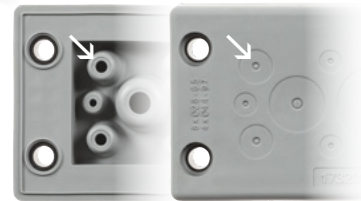

Model	Code	Cable nr.	Ø Cable min/max [mm]	Dimensions [mm]		Pcs /pack
				Cut-out	Plate	
DES PDM 24/14G	1732012414	10 - 4 -	2,8 / 6,5 14,5 / 22	112 x 36	148,6 x 59,6	10
DES PDM 24/15G	1732012415	15 -	6,8 / 12			
DES PDM 24/16G	1732012416	8 - 4 - 2 - 2 -	2,8 / 6,5 4,4 / 9,7 8,6 / 16,2 14,5 / 22			
DES PDM 24/17G	1732012417	6 - 6 - 5 -	2,8 / 6,5 4,6 / 10,2 8,6 / 16,2			
DES PDM 24/25G	1732012425	12 - 7 - 6 -	2,8 / 6,5 4,4 / 9,7 6,8 / 12			
DES PDM 24/32G	1732012432	21 - 8 - 3 -	2,8 / 6,5 4,6 / 10,2 6,8 / 12			
DES PDM 24/42G	1732012442	42 -	2,8 / 6,5			
DES PDM 24/124G	1732012421	120 - 4 -	1,75/4,7 2,3/6			

The DES PDM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +110°C (static)

Features: halogens and silicones free

Related products

IFP plugs (page 85)


DES PDM caps (page 85)

HY360 hydraulic punch driver (page 129)

PF/PFX cable entry system plates (from page 130)

NEW

Dimensions [mm]

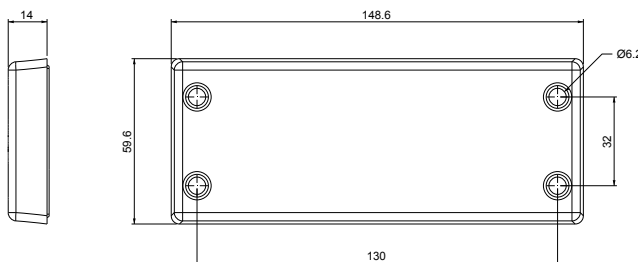

* Indoor only



IP66
IP68

NEMA
12, 4X

UL TYPE
12, 4X



ECOLAB

UL94-V0



RoHS
COMPLIANT



© Detas SpA - ISO9001/ ISO14001 certified company


Via Trepontj, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120 - info@detasultra.com - www.detasultra.com





Cable entry plates with internal frame and double membrane

- ▶ For large number of cables without connectors
- ▶ High strain relief thanks to the double membrane
- ▶ Cost efficient solution
- ▶ IP66 and NEMA 4X* certified
- ▶ ATEX version on request (see group 7)
- ▶ Threaded inserts or plastic rivets version on request

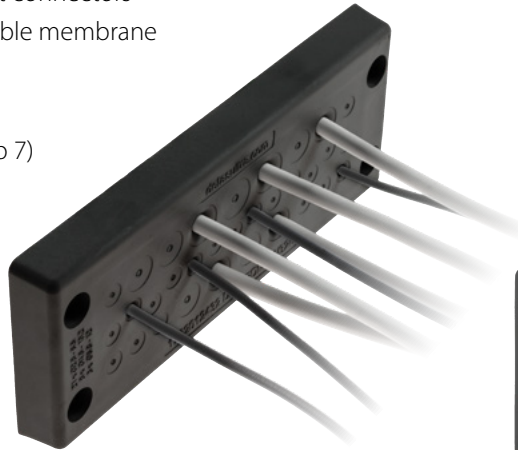

Double parallel membrane



Model	Code	Cable nr.	Ø Cable min/max [mm]	Dimensions [mm]		Pcs /pack
				Cut-out	Plate	
DES PDM 24/14B	1732013415	10 - 4 -	2,8 / 6,5 14,5 / 22	112 x 36	148,6 x 59,6	10
DES PDM 24/15B	1732013416	15 -	6,8 / 12			
DES PDM 24/16B	1732013417	8 - 4 - 2 - 2 -	2,8 / 6,5 4,4 / 9,7 8,6 / 16,2 14,5 / 22			
DES PDM 24/17B	1732013418	6 - 6 - 5 -	2,8 / 6,5 4,6 / 10,2 8,6 / 16,2			
DES PDM 24/25B	1732013426	12 - 7 - 6 -	2,8 / 6,5 4,4 / 9,7 6,8 / 12			
DES PDM 24/32B	1732013433	21 - 8 - 3 -	2,8 / 6,5 4,6 / 10,2 6,8 / 12			
DES PDM 24/42B	1732013443	42 -	2,8 / 6,5			

The DES PDM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing
acc. to UL94-V0

Temperature: -40°C... +110°C (static)

Features: halogens and silicones free

Related products


IFP plugs (page 85)

DES PDM caps (page 85)

HY360 hydraulic punch driver (page 129)

PF/PFX cable entry system plates (from page 130)

Dimensions [mm]

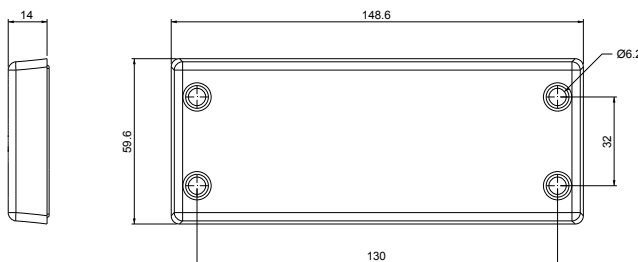

* Indoor only



IP66
IP68

NEMA
12, 4X*

UL TYPE
12, 4X



ECOLAB



RoHS
COMPLIANT

