

CD12M/0B-020C5

connectors




Micro Detectors

Italian Sensors Technology



Indicative image

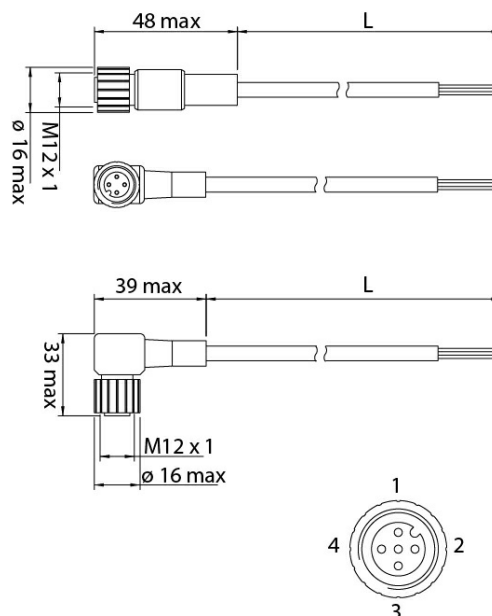

Electrical data

Nominal current	4 A
Led	No
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Tightening torque	0,6 Nm
Operating temperature	-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)
1	2
Plug	M12
Outer diameter	Ø 4,7 mm ± 5%
Head type	90°
Gasket material	PUR
Wire isolation	PVC

Test/Approvals

Degree of protection

IEC IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1 _____

WH/2 _____

BU/3 _____

BK/4 _____

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

19/09/2019 13:39:18