

CF/RC9-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

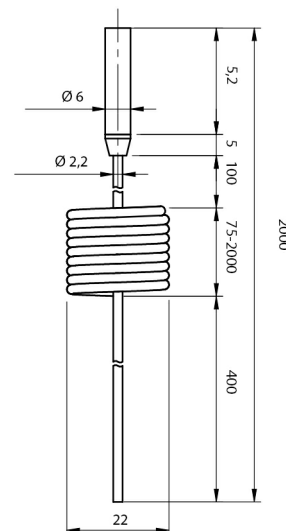

Detection properties

Distance with SSF	1.000 mm
Distance with FS1	1.000 mm
Distance with FX3	6.000 mm
Distance with FX4	8.000 mm
Distance with F1R	2.200 mm

Application

Function Principle Through-beam P/R

Description Plastic optical fibres

Mechanical data

Operating temperature -40°C....+70°C (posa fissa)

1 2

1 mm 1 mm spiralata

M4 con sleeve Ø 6 with lenti

vetro, ETM, inox PE, plastic

ottone nichelato nickel-plated brass

Test/Approvals

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

06/05/2020 15:30:53