



Features:

- On Delay
- 10 Time Ranges
- Front knobs for Time Range & Time Scale
- Slim, Space Saving Design
- DIN Rail Mount

Size: DIN 17.5mm

Certifications: PENDING

Technical Specifications

Input Specifications

Accuracy	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
Reset	Reset time < 100 msec

Output Specifications

Output Contact	SPDT (1 C/O)
Contact Rating	NO/5A, NC/3A@250V AC

Functional Specifications

Modes	On delay
Time Ranges	0.1 - 1 sec, 0.3 - 3 sec, 1 - 10 sec, 3 - 30 sec 0.1 - 1 min, 0.3 - 3 min, 1 - 10 min, 3 - 30 min 0.1 - 1 hr, 0.3 - 3 hr


Supply Voltage

Supply Voltage	240V AC (AC : 50 / 60Hz)
----------------	--------------------------

Environmental Specifications


Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	61 gms
Protection Level	IP50 for faceplate IP40 for housing IP20 for terminals

Dimensions

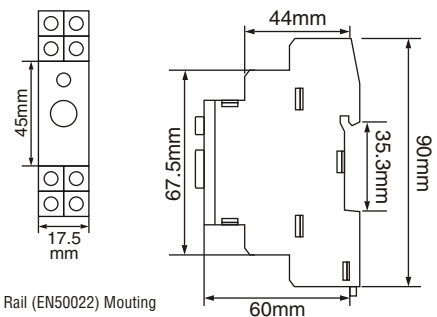


Symmetrical 35mm Din Rail (EN50022) Mounting

Terminal Connections

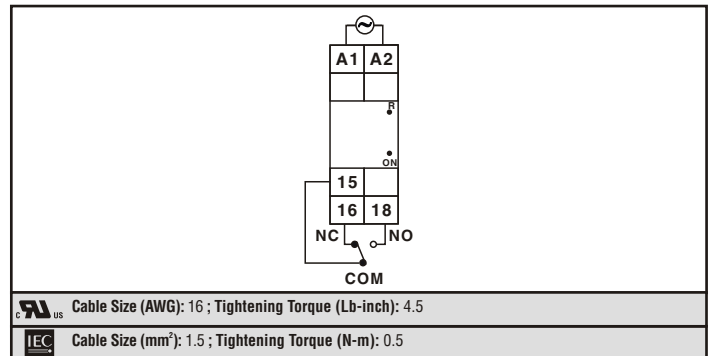

Timing Diagram

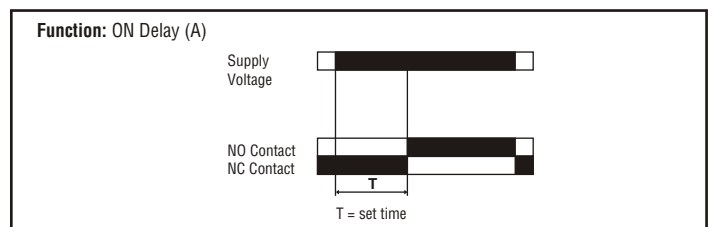

Ordering Information

Part No.	Supply Voltage			Certification	
	240V AC	110V AC	24V AC/DC		PENDING
600ST	■			■	
600ST-CU	■			■	■
600ST-110-CU		■		■	■
600ST-24-CU			■	■	■