


CF/CA4-05

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

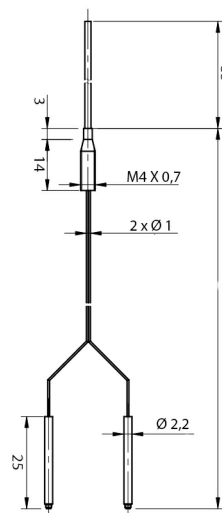

Detection properties

| | |
|-------------------|-------|
| Distance with SSF | 15 mm |
| Distance with FS1 | 15 mm |
| Distance with FX3 | 60 mm |
| Distance with FX4 | 80 mm |
| Distance with F1R | 40 mm |

Application

Function Principle: Diffuse reflection

Description: Plastic optical fibres

Mechanical data

Operating temperature: -40°C....+70°C (posa fissa)

1: 0,5

1 mm: 0,5 mm

M4 con sleeve: M4 with sleeve

vetro, ETM, inox: PE, plastic

ottone nichelato: nickel-plated brass

Test/Approvals

Degree of protection

IP67

Accessories

Accessories to be ordered
separately

AF/1A2

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

05/05/2020 12:53:27