

# CF/RA7-30

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

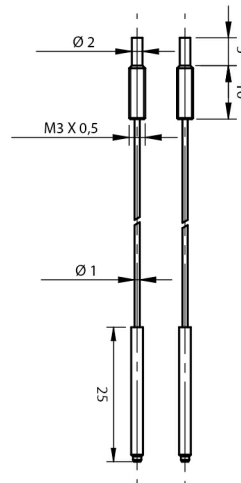

## Detection properties

Distance with SSF	30 mm
Distance with FS1	30 mm
Distance with FX3	150 mm
Distance with FX4	250 mm
Distance with F1R	100 mm

## Application

Function Principle	Through-beam P/R
Description	Plastic optical fibres

## Mechanical data

Operating temperature	-40°C....+55°C (posa fissa)
1	3
1 mm	0,5 mm
M4 con sleeve	M3
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

## Test/Approvals

Degree of protection

IP67

## Accessories

Accessories to be ordered  
separately

AF/1A2

---

---

### **M.D.Micro Detectors S.p.A.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

### **date of printing**

06/05/2020 14:39:04