



Model	Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs /pack
			Ø Cut-out	Ø Plate	
DES-PM M 25 4B	type 1: 1732063505	4 - max. 8	min.: 25 max.: 26 recomm.: 25.5	34	10
DES-PM M 25 6B	type 1: 1732063507	4 - max. 5.2 2 - max. 9.4			
DES-PM M 32 10B	type 1: 1732064211 type 2: 1732264211	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 recomm.: 32.5	40	10
DES-PM M 50 9B	type 1: 1732066010	5 - max. 7 4 - max. 18.3			
DES-PM M 50 11B	type 1: 1732066012	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM M 50 12B	type 1: 1732066013 type 2: 1732266013	10 - max. 9 2 - max. 11.4			
DES-PM M 50 15B	type 1: 1732066016	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12	min.: 50 max.: 51 recomm.: 50.5	62	10
DES-PM M 50 17B	type 1: 1732066018	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM M 50 20B	type 1: 1732066021	16 - max. 6.5 4 - max. 9.7			

Round cable entry plates for non-terminated cables

- ▶ For several number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized




The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Type 1 Type 2



Double membrane

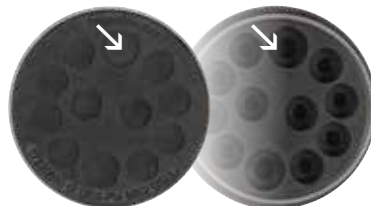

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free


Type 1: wall thickness from 1.5 to 2.5 mm

Type 2: wall thickness from 2.8 to 4 mm

Related products

Hydraulic punch driver HY360

Dimensions [mm]



Round cable entry plates for non-terminated cables

- ▶ For several number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized



The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Type 1: wall thickness from 1.5 to 2.5 mm

Type 2: wall thickness from 2.8 to 4 mm


Related products

Hydraulic punch driver HY360



Model	Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs /pack
			Ø Cut-out	Ø Plate	
DES-PM M 25 4G	type 1: 1732062504	4 - max. 8	min.: 25 max.: 26 recomm.: 25.5	34	10
DES-PM M 25 6G	type 1: 1732062506	4 - max. 5.2 2 - max. 9.4			
DES-PM M 32 10G	type 1: 1732063210 type 2: 1732263210	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 recomm.: 32.5	40	10
DES-PM M 50 9G	type 1: 1732065009	5 - max. 7 4 - max. 18.3			
DES-PM M 50 11G	type 1: 1732065011	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM M 50 12G	type 1: 1732065012 type 2: 1732265012	10 - max. 9 2 - max. 11.4			
DES-PM M 50 15G	type 1: 1732065015	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12	min.: 50 max.: 51 recomm.: 50.5	62	10
DES-PM M 50 17G	type 1: 1732065017	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM M 50 20G	type 1: 1732065020	16 - max. 6.5 4 - max. 9.7			

Double membrane

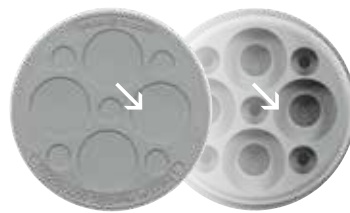

Type 1 Type 2



Dimensions [mm]

