

CF/RCA-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

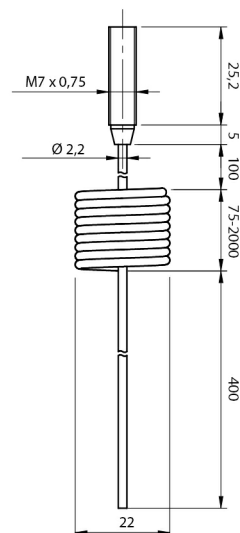

Detection properties

| | |
|-------------------|----------|
| Distance with SSF | 1.000 mm |
| Distance with FS1 | 1.000 mm |
| Distance with FX3 | 6.000 mm |
| Distance with FX4 | 8.000 mm |
| Distance with F1R | 2.200 mm |

Application

| | |
|--------------------|------------------------|
| Function Principle | Through-beam P/R |
| Description | Plastic optical fibres |

Mechanical data

| | |
|-----------------------|-----------------------------|
| Operating temperature | -40°C....+70°C (posa fissa) |
| 1 | 2 |
| 1 mm | 1 mm spiralata |
| M4 con sleeve | M 7 with lenti |
| vetro, ETM, inox | PE, plastic |
| ottone nichelato | nickel-plated brass |

Test/Approvals

Degree of protection

IP67

Accessories

Accessories to be ordered
separately

ST 28

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

06/05/2020 15:33:39