

CF/CC1-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

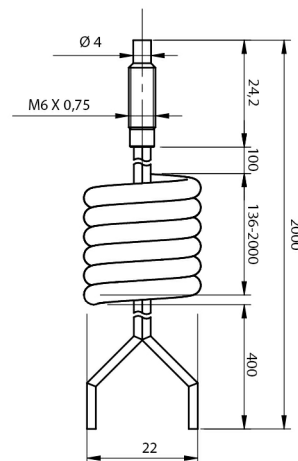

Detection properties

Distance with SSF	15 mm
Distance with FS1	15 mm
Distance with FX3	70 mm
Distance with FX4	100 mm
Distance with F1R	50 mm

Application

Function Principle Diffuse reflection

Description Plastic optical fibres

Mechanical data

Operating temperature -40°C....+70°C (posa fissa)

1 2

1 mm 1 mm spiralata

M4 con sleeve M6

vetro, ETM, inox PE, plastic

ottone nichelato nickel-plated brass

Test/Approvals

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

05/05/2020 14:32:58