



| Model | Code | Cable nr. - Ø cables min/max [mm] | Thread x1.5 | Dimensions Ø P [mm] | Pcs /pack |
|------------------|------------|--|----------------|------------------------|--------------|
| DES-PDM M32 4B | 1732034205 | 3 - 2.6 / 6.5 1 - 5.5 / 12.5 | M32 | 46 | 10 |
| DES-PDM M32 4-2B | 1732034252 | 4 - 3.5 / 8.8 | | | |
| DES-PDM M32 7B | 1732034208 | 7 - 2.6 / 6.5 | | | |
| DES-PDM M40 8B | 1732035009 | 4 - 2.6 / 6.5 4 - 4 / 10.2 | M40 | 54 | 10 |
| DES-PDM M50 8B | 1732036009 | 5 - 4.6 / 10.2 3 - 6.8 / 12.5 | M50 | 64 | 10 |
| DES-PDM M50 10B | 1732036011 | 7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22 | | | |
| DES-PDM M50 12B | 1732036013 | 4 - 2.8 / 6.5 8 - 4.6 / 10.2 | | | |
| DES-PDM M50 19B | 1732036020 | 19 - 2.8 / 6.5 | | | |
| DES-PDM M63 9B | 1732037310 | 1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20 | M63 | 77 | 10 |
| DES-PDM M63 13B | 1732037314 | 4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2 | | | |
| DES-PDM M63 14B | 1732037315 | 14 - 5 / 10 | | | |
| DES-PDM M63 35B | 1732037336 | 35 - 2.6 / 5.5 | | | |

Round cable entry plates with internal frame and locknut


- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane

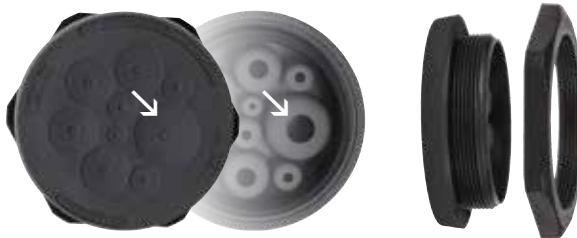

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0


Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Related products

Hydraulic punch driver HY360

Dimensions [mm]

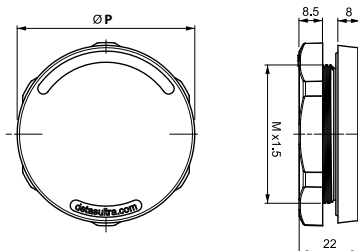



Round cable entry plates with internal frame and locknut

- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



2

The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Related products

Hydraulic punch driver HY360

| Model | Code | Cable nr. - Ø cables min/max [mm] | Thread x1.5 | Dimensions Ø P [mm] | Pcs /pack |
|------------------|------------|--|----------------|------------------------|--------------|
| DES-PDM M32 4G | 1732033204 | 3 - 2.6 / 6.5 1 - 5.5 / 12.5 | M32 | 46 | 10 |
| DES-PDM M32 4-2G | 1732033242 | 4 - 3.5 / 8.8 | | | |
| DES-PDM M32 7G | 1732033207 | 7 - 2.6 / 6.5 | | | |
| DES-PDM M40 8G | 1732034008 | 4 - 2.6 / 6.5 4 - 4 / 10.2 | M40 | 54 | 10 |
| DES-PDM M50 8G | 1732035008 | 5 - 4.6 / 10.2 3 - 6.8 / 12.5 | M50 | 64 | 10 |
| DES-PDM M50 10G | 1732035010 | 7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22 | | | |
| DES-PDM M50 12G | 1732035012 | 4 - 2.8 / 6.5 8 - 4.6 / 10.2 | | | |
| DES-PDM M50 19G | 1732035019 | 19 - 2.8 / 6.5 | | | |
| DES-PDM M63 9G | 1732036309 | 1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20 | M63 | 77 | 10 |
| DES-PDM M63 13G | 1732036313 | 4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2 | | | |
| DES-PDM M63 14G | 1732036314 | 14 - 5 / 10 | | | |
| DES-PDM M63 35G | 1732036335 | 35 - 2.6 / 5.5 | | | |

Double membrane



Dimensions [mm]

