



Model	Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs /pack
			Cut-out	Plate	
DES-PM 24 12B	1732053413	12 - max. 15	112 x 36 max. +0.5	144 x 46	10
DES-PM 24 14B	1732053415	14 - max. 12.1			
DES-PM 24 17B	1732053418	5 - max. 10.5 12 - max. 12.6			
DES-PM 24 18B	1732053419	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM 24 20B	1732053421	13 - max. 6.5 7 - max. 12.1			
DES-PM 24 26B	1732053427	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - ASI cable			
DES-PM 24 42B	1732053443	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM 24 48B	1732053449	48 - max. 6.5			
DES-PM 24 50B	1732053451	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			

## Cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)



Double membrane



The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

2

### Technical data

**Material:** TPE

**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +105°C (static)


**Features:** halogens and silicones free

**Wall thickness:** from 1.5 to 2.5 mm

### Related products

Hydraulic punch driver HY360

### Dimensions [mm]

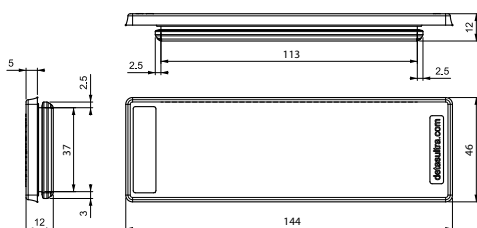



## Cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)




Model	Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs /pack
			Cut-out	Plate	
DES-PM 24 12G	1732052412	12 - max. 15	112 x 36 max. +0.5	144 x 46	10
DES-PM 24 14G	1732052414	14 - max. 12.1			
DES-PM 24 17G	1732052417	5 - max. 10.5 12 - max. 12.6			
DES-PM 24 18G	1732052418	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM 24 20G	1732052420	13 - max. 6.5 7 - max. 12.1			
DES-PM 24 26G	1732052426	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - ASI cable			
DES-PM 24 42G	1732052442	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM 24 48G	1732052448	48 - max. 6.5			
DES-PM 24 50G	1732052450	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			

The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane

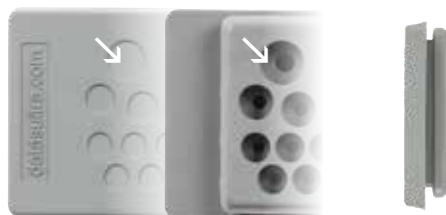

2

### Technical data

**Material:** TPE

**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +105°C (static)


**Features:** halogens and silicones free

**Wall thickness:** from 1.5 to 2.5 mm

### Related products

Hydraulic punch driver HY360

### Dimensions [mm]

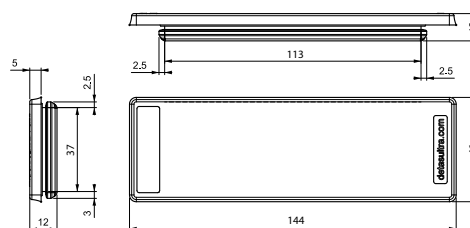

				up to <b>IP66</b>	up to <b>NEMA 4X</b>			
--	--	--	--	-------------------	----------------------	--	--	--