

# CF/RB3-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

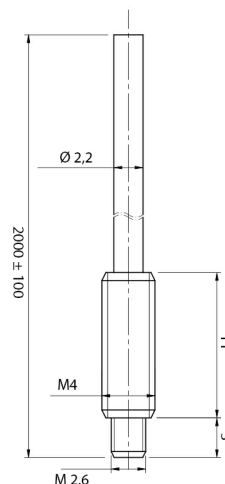

## Detection properties

Distance with SSF	120 mm
Distance with FS1	120 mm
Distance with FX3	700 mm
Distance with FX4	700 mm
Distance with F1R	150 mm

## Application

Function Principle Through-beam P/R

Description Plastic optical fibres

## Mechanical data

Operating temperature -40°C....+55°C (posa fissa)

1 2

1 mm 1 mm

M4 con sleeve M4

vetro, ETM, inox PE, plastic

ottone nichelato nickel-plated brass

## Test/Approvals

Degree of protection

IP67

## Accessories

Accessories to be ordered  
separately

AF/ER9

---

---

### **M.D.Micro Detectors S.p.A.**

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

### **date of printing**

06/05/2020 14:43:16