

CV/CB1-10

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

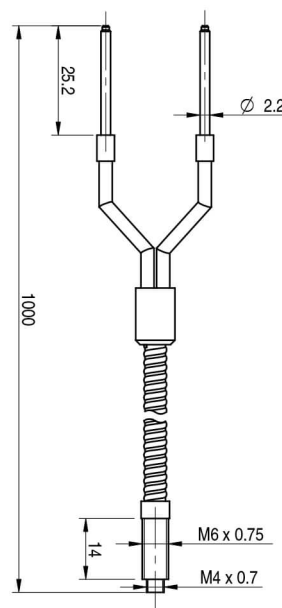

Detection properties

Distance with SSF	50 mm
Distance with FS1	50 mm
Distance with FX3	150 mm
Distance with FX4	150 mm

Application

Function Principle	Diffuse reflection
Description	Glass fibres up to 200°C

Mechanical data

Operating temperature	-40°C....+200°C (posa fissa)
1	1
1 mm	1 mm
M4 con sleeve	M4
vetro, ETM, inox	glass, ETM, inox
ottone nichelato	nickel-plated brass

Test/Approvals

Degree of protection	IP67
----------------------	------

Accessories

Accessories to be ordered
separately

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

06/05/2020 15:51:03