





**Features:**

- True RMS Measurement
- For 1 Phase 2 Wire Electrical Network

Certifications:  

**Display Specifications**

Display	Single row, 7 segment LED Display
Digits	3 Digit
Digit Height	0.56" (14.2mm)
Display Range	0 - 516V


**Mechanical Specifications**

Mounting	Panel mount
Weight	170 gms (0.374 lbs)

**Input Specifications**

Electrical Connection	1 Ø-2 wire
Input Type	AC
Input Voltage Range	50-480V
Continuous Max. Input Rating	516V
Overrange Indication	"Or" for input > 516V
Frequency	50 / 60Hz
Resolution	1V
Accuracy	±0.5% of F.S
Input Impedance	1MΩ (± 5%)
Sampling Rate	3 samples / second
Dielectric withstand Voltage	2kV AC between auxiliary supply & measuring input
Rated Impulse withstand Voltage	3.5kV (1.2/50µs)


**Dimensions**

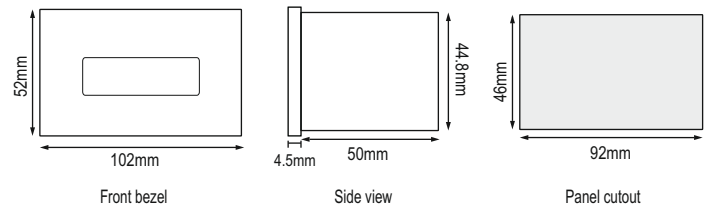

**Auxiliary Supply Specifications**

Auxiliary Supply	AC: 240V AC ± 20%, (50 / 60Hz) 110V AC ± 20%, (60Hz)
Power Consumption	5VA max

**Terminal Connections**

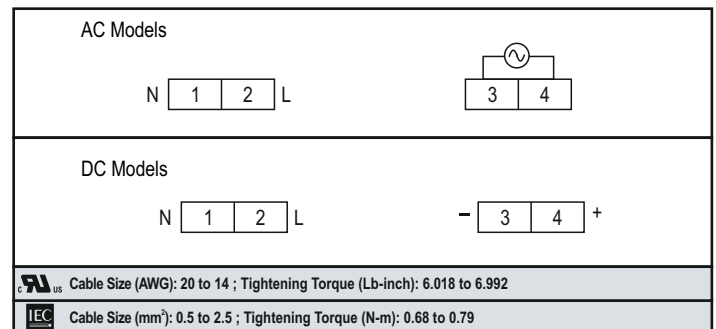

**Environmental Specifications**

Temperature	Operating: -10 to +55°C (14 to 131°F) Storage: -20 to +75°C (-4 to 167°F)
Humidity (non-condensing)	Up to 95% RH

## Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		Standards Compliance
ESD Immunity	IEC 61000-4-2	Level IV (Air discharge : 15kV), (Contact Discharge : -8kV)
Surge Immunity	IEC 61000-4-5	+/- 2kV common mode, (Line to ground) +/- 1kV differential mode, (Line to Line)
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz (10V/m) Level II, 1.4GHz to 2GHz (3V/m) Level I, 2GHz to 2.7GHz (1V/m)
Conducted Susceptibility	IEC 61000-4-6	Level II (3V/m)
Voltage Dips and Interruptions	IEC 61000-4-11	<b>Dips</b> : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) <b>Interruptions</b> : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	
Radiated Emission	CISPR-11	
Electrical Fast Transient	IEC 61000-4-4	Level III (2kV)

## Ordering Information

Product Code	Supply Voltage		Certification	
	240V AC	110V AC	CE	cUL LISTED
MV15	■			
MV15-CE	■		■	
MV15-230V-CE	■		■	
MV15-AC-20/200V	■			
MV15-AC-200/2000mV	■		■	■
MV15-DC-2V	■			
MV15-DC-20V	■			
MV15-DC-20V-110V-CU		■	■	■
MV15-DC-200V	■			
MV15-DC-200V-110V		■		
MV15-DC-200V-110V-CU		■	■	■
MV15-DC-200mV	■			